



Guide



Signal



Urban space



Roads



Motorways & Expressways

ROAD MARKING PRODUCTS > WATER-BASED PAINT

EOLE ASIO



Odourless, water-based retroreflective paint for high-performance road and urban road markings in traditional applications.

PERFORMANCE

SINGLE-BEADING REFLECTIVE ROAD MARKING

P5 - Q2 - R4 - S2

P: Traffic resistance
Q: Daytime visibility
R: Night-time visibility
S: Anti-slip

SOCIAL AND ENVIRONMENTAL BENEFITS

- **CIRCULAR ECONOMY**
Use of recycled water in manufacture
75% recyclable packaging
- **WASTE REDUCTION**
Sakapo® reduces the weight of non-recyclable waste by 65%
- **AIR QUALITY**
Low impact on air quality
- **MADE IN FRANCE**
Made in the Hauts-de-France region

ADVANTAGES

USE

- Durable road markings: certified for 1 million wheelovers
- Exceptional night-time visibility of road markings, ensuring greater user safety
- Short drying time limiting the disruption caused during works
- Products certified pursuant to standards NF EN 1436 and NF EN 1824

USE

- No ammonia odour for ease of application
- Not subject to regulations on the transport and storage of hazardous materials
- Sakapo® and Sakafu specific packaging to facilitate waste management and reduce costs




MADE IN FRANCE



TECHNICAL CHARACTERISTICS

- Water-based acrylic paint
- Density: 1.66kg/l
- Packaging:
 - 25kg net metal buckets fitted with Sakapo®
 - 300kg net total drums with removable head containing Sakafu

Other packaging: please contact us

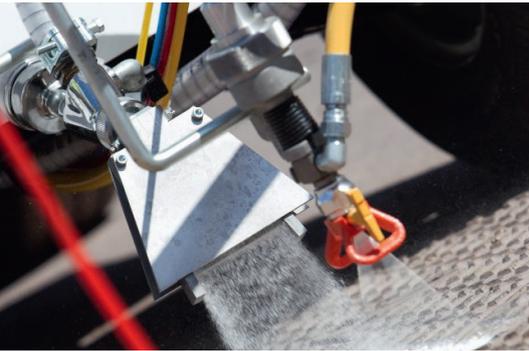

IMPLEMENTATION

- Pneumatic or airless machine fitted with a stainless steel tank (30 mesh filter)
- Avoid contact with oxidisable materials (iron, brass, copper, etc.)
- New or old hydrocarbon surfaces
- Apply to a clean, dry surface
- Surface temperature limits: $5^{\circ}\text{C} < T < 45^{\circ}\text{C}$
- Maximum humidity: 80%

CONSUMPTION*

Single-beading retroreflective coating

Product rate	425g/m ²
Powdering rate	410g/m ²
Drying time	5min

* According to certification conditions



SAFETY - STORAGE

- Product for professional use, non-harmful, non-irritant, non-flammable
- Storage: in a dry, ventilated place, away from frost, sunlight and any source of heat
- Shelf life: 12 months from date of manufacture, in unopened original packaging
- Soiled packaging and cleaning and rinsing products are waste to be treated in accordance with current regulations
- See the Safety Data Sheet at www.quickfds.fr