



Guide



Signal



Roads



Motorways & Expressways

ROAD MARKING PRODUCTS ► WATER-BASED PAINT

AXI-ULTIMA



◀ Water-based paint for road markings with exceptional, long-lasting night-time visibility. ▶

PERFORMANCE

SINGLE-BEADING REFLECTIVE ROAD MARKING

P5 - Q2 - R3 - S2

P2B REFLECTIVE ROAD MARKING

P6 - Q2 - R3 - S1

WET NIGHT VISIBILITY ROAD MARKING

P4 - Q2 - R4 - S1

P: Traffic resistance
Q: Daytime visibility
R: Night-time visibility
S: Anti-slip

ADVANTAGES

► USE

- **Long-lasting** road markings: certification for up to 2 million wheelovers over 2 climatic cycles
- Excellent **night visibility**: retroreflection value of 249 after 1 million wheelovers
- Reduced disruption during works thanks to very rapid restoration of traffic
- NF Environnement eco-label guaranteeing the product's low impact on the environment throughout its life cycle
- Products certified pursuant to standards NF EN 1436 and NF EN 1824
- Performance of wet night visibility road marking in wet and rainy weather: RR2/RW3

► USE

- **Versatility of use** simplifies worksite management: certification for traditional and P2B technical applications
- **Low coverage rate** reduces the need for refilling during application and optimises yields on large worksites
- Water-based product that protects users' health and safety
- Not subject to regulations on the transport and storage of hazardous materials
- Sakapo® and Sakafu specific packaging to facilitate waste management and reduce costs

SOCIAL AND ENVIRONMENTAL BENEFITS

- **CIRCULAR ECONOMY**
Use of recycled water in manufacture
75% recyclable packaging
- **WASTE REDUCTION**
Sakapo® reduces the weight of non-recyclable waste by 65%
- **AIR QUALITY**
Low impact on air quality
- **MADE IN FRANCE**
Made in the Hauts-de-France region




MADE IN FRANCE

TECHNICAL CHARACTERISTICS

- Water-based acrylic paint
- Density: 1.68kg/l
- Packaging:
 - 25kg net metal buckets fitted with Sakapo®
 - 300kg net total drums with removable head containing Sakafu

Other packaging: please contact us

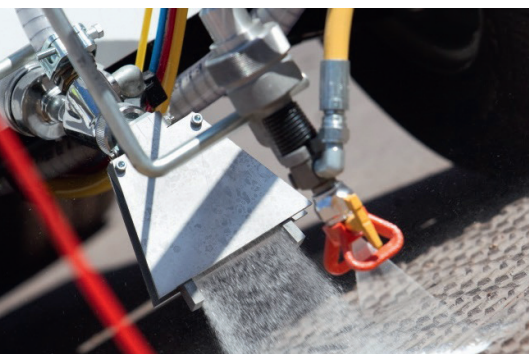

IMPLEMENTATION

- Pneumatic or airless machine fitted with a stainless steel tank (30 mesh filter)
- Avoid contact with oxidisable materials (iron, brass, copper, etc.)
- New or old hydrocarbon surfaces
- Apply to a clean, dry surface
- Surface temperature limits: $5^{\circ}\text{C} < T < 45^{\circ}\text{C}$
- Maximum humidity: 80%

CONSUMPTION*	Reflective		
	Single beading	Double beading	Wet night visibility
Product rate	310g/m ²	375g/m ²	740g/m ²
Powdering rate	340g/m ²	460g/m ²	870g/m ²
Drying time	4min	2min	4min

* According to certification conditions

SAFETY - STORAGE

- Product for professional use, non-harmful, non-irritant, non-flammable
- Storage: in a dry, ventilated place, away from frost, sunlight and any source of heat
- Shelf life: 12 months from date of manufacture, in unopened original packaging
- Soiled packaging and cleaning and rinsing products are waste to be treated in accordance with current regulations
- See the Safety Data Sheet at www.quickfds.fr