



Guide



Signal



Urban space



Roads

Motorways &  
Expressways

ROAD MARKING PRODUCTS ► WATER-BASED PAINT

# TYPHON PERFORMANCE



Water-based paint ideal for maintenance works on road markings, in traditional or wet night visibility application. »

## PERFORMANCE

### REFLECTIVE ROAD MARKING

P5 - Q2 - R3 - S1  
P5 - Q2 - R4 - S1

### NON-REFLECTIVE ROAD MARKING

P5 - Q4 - S3

### WET NIGHT VISIBILITY ROAD MARKING

P4 - Q2 - R3 - RR2 - RW3 - S1

P: Traffic resistance  
Q: Daytime visibility  
R: Night-time visibility  
RR: Night-time visibility in rainy weather  
RW: Night-time visibility in wet weather  
S: Anti-slip

## ADVANTAGES

### ► USE

- Excellent **visibility day and night**, even in the rain
- Good **anti-slip** performance in urban environments with S3 certification
- Reduced disruption during works thanks to **rapid restoration of traffic**
- NF Environnement eco-label guaranteeing the product's low impact on the environment throughout its life cycle
- Products certified pursuant to standards NF EN 1436 and NF EN 1824

### ► USE

- **Very good applicability**
- **Flexibility and time savings in worksite management thanks to multi-certification**
- Not subject to regulations on the transport and storage of hazardous materials
- Sakapo® and Sakafu specific packaging to facilitate waste management and reduce costs

## SOCIAL AND ENVIRONMENTAL BENEFITS

- **CIRCULAR ECONOMY**  
Use of recycled water in manufacture  
75% recyclable packaging
- **WASTE REDUCTION**  
Sakapo® reduces the weight of non-recyclable waste by 65%
- **AIR QUALITY**  
Low impact on air quality
- **MADE IN FRANCE**  
Made in the Hauts-de-France region



MADE IN  
FRANCE


# TYPHON PERFORMANCE



## TECHNICAL CHARACTERISTICS

- Water-based acrylic paint
- Density: 1.66kg/l
- Packaging:
  - 25kg net metal buckets fitted with Sakapo®
  - 300kg net total drums with removable head containing Sakafu®

Other packaging: please contact us

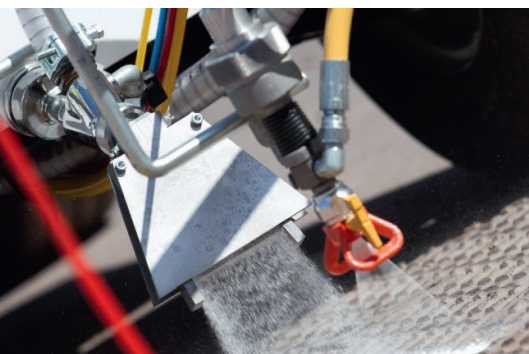

## IMPLEMENTATION

- Pneumatic or airless machine fitted with a stainless steel tank (30 mesh filter)
- Avoid contact with oxidisable materials (iron, brass, copper, etc.)
- New or old hydrocarbon surfaces
- Apply to a clean, dry surface
- Surface temperature limits:  $5^{\circ}\text{C} < T < 45^{\circ}\text{C}$
- Maximum humidity: 80%

CONSUMPTION*	Non-reflective	Reflective	
		Single beading	WET NIGHT VISIBILITY
Product rate	480g/m <sup>2</sup>	≥ 395g/m <sup>2</sup>	760g/m <sup>2</sup>
Powdering rate	120g/m <sup>2</sup>	≥ 370g/m <sup>2</sup>	760g/m <sup>2</sup>
Drying time	3min	2min	-

\* According to certification conditions



## SAFETY - STORAGE

- Product for professional use, non-harmful, non-irritant, non-flammable
- Storage: in a dry, ventilated place, away from frost, sunlight and any source of heat
- Shelf life: 12 months from date of manufacture, in unopened original packaging
- Soiled packaging and cleaning and rinsing products are waste to be treated in accordance with current regulations
- See the Safety Data Sheet at [www.quickfds.fr](http://www.quickfds.fr)

