



Guide



Signal



Urban space



Roads



Private sites

ROAD MARKING PRODUCTS > WATER-BASED PAINT

# TYPHON® CITY-ROAD



Multi-purpose water-based paint for road markings in town and on roads to guide users effectively.

## PERFORMANCE

### REFLECTIVE ROAD MARKING

P5 - Q2 - R3 - S2

### NON-REFLECTIVE ROAD MARKING

P5 - Q3 - S1  
P5 - Q3 - S3

P: Traffic resistance  
Q: Daytime visibility  
R: Night-time visibility  
S: Anti-slip

## SOCIAL AND ENVIRONMENTAL BENEFITS

- **CIRCULAR ECONOMY**  
Use of recycled water in manufacture  
75% recyclable packaging
- **WASTE REDUCTION**  
Sakapo® reduces the weight of non-recyclable waste by 65%
- **AIR QUALITY**  
Low impact on air quality
- **MADE IN FRANCE**  
Made in the Hauts-de-France region

## ADVANTAGES

### USE

- Good **anti-slip** performance, particularly in urban environments, with S3 certification
- Reduced disruption during works thanks to **very rapid restoration of traffic**
- Products certified pursuant to standards NF EN 1436 and NF EN 1824

### USE

- Flexibility and time savings in worksite management thanks to **multi-certification**
- **Water-based product** protects users' health and safety
- Not subject to regulations on the transport and storage of hazardous materials
- Sakapo® and Sakafu specific packaging to facilitate waste management and reduce costs




MADE IN FRANCE



## TECHNICAL CHARACTERISTICS

- Water-based acrylic paint
- Density: 1.68kg/l
- Packaging:
  - 25kg net metal buckets fitted with Sakapo®
  - 300kg net total drums with removable head containing Sakafu

Other packaging: please contact us

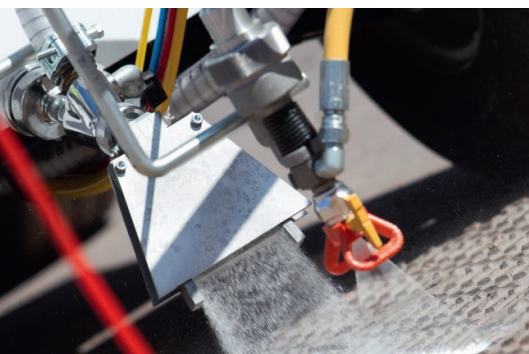

## IMPLEMENTATION

- Pneumatic or airless machine fitted with a stainless steel tank (30 mesh filter)
- Avoid contact with oxidisable materials (iron, brass, copper, etc.)
- New or old hydrocarbon surfaces
- Apply to a clean, dry surface
- Surface temperature limits: 10°C < T < 45°C
- Maximum humidity: 80%

CONSUMPTION*	Non-reflective	Reflective
Product rate	≥ 335g/m <sup>2</sup>	305g/m <sup>2</sup>
Powdering rate	No powdering in S1 - 60g/m <sup>2</sup> in S3	275g/m <sup>2</sup>
Drying time	2 to 5min	2min

\* According to certification conditions



## SAFETY - STORAGE

- Product for professional use, non-harmful, non-irritant, non-flammable
- Storage: in a dry, ventilated place, away from frost, sunlight and any source of heat
- Shelf life: 12 months from date of manufacture, in unopened original packaging
- Soiled packaging and cleaning and rinsing products are waste to be treated in accordance with current regulations
- See the Safety Data Sheet at [www.quickfds.fr](http://www.quickfds.fr)