



Guide



Signal



Urban space



Roads



Motorways &amp; Expressways

ROAD MARKING PRODUCTS &gt; REACTIVE PAINT

# GRIFFON CITY-ROAD



Reactive paint for extra-white, ultra-resistant road markings in town and on roads.

## ADVANTAGES

### USE

- Road markings certified for up to 2 million wheelovers, with exceptional durability over time
- Versatility of use: in town or on roads, using traditional, P2B or wet night visibility technology
- Excellent visibility day and night, even in the rain
- Highly anti-slip product for maximum user safety in urban environments: average SRT  $\geq 0.59$
- Products certified pursuant to standards NF EN 1436 and NF EN 1824

### USE

- Liquid/bead two-component applicable with conventional equipment
- Flexibility and time savings in worksite management thanks to multi-certification
- Sakapo® and Sakafu specific packaging to facilitate waste management and reduce costs

## PERFORMANCE

### NON-REFLECTIVE ROAD MARKING

P6 - Q4 - S2  
P5 - Q3 - S4

### SINGLE-BEADING REFLECTIVE ROAD MARKING

P5 - Q2 - R4 - S2

### DOUBLE-BEADING REFLECTIVE ROAD MARKING

P6 - Q2 - R4 - S1  
P5 - Q4 - R3 - S1

### WET NIGHT VISIBILITY ROAD MARKING

P5 - Q3 - R4 - RR2 - RW2 - S2

P: Traffic resistance  
Q: Daytime visibility  
R: Night-time visibility  
RR: Night-time visibility in rainy weather  
RW: Night-time visibility in wet weather  
S: Anti-slip

## SOCIAL AND ENVIRONMENTAL BENEFITS

- CIRCULAR ECONOMY  
75% recyclable packaging
- WASTE REDUCTION  
Sakapo® reduces the weight of non-recyclable waste by 65%
- MADE IN FRANCE  
Made in the Normandy region



MADE IN FRANCE


# GRIFFON CITY-ROAD



## TECHNICAL CHARACTERISTICS

- Liquid/bead reactive paint
- Density: 1.78kg/l
- Packaging:
  - 25kg net metal buckets fitted with Sakapo®
  - 300kg net total drums with removable head containing Sakafu

Other packaging: please contact us

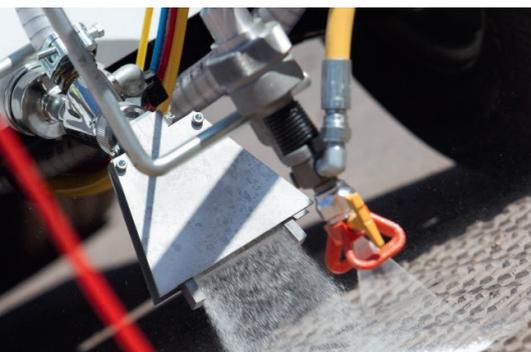

## IMPLEMENTATION

- Pneumatic or airless machine (60 mesh filter) equipped with 1 or 2 bead tanks and 1 or 2 bead guns depending on the application technique selected
- New or old hydrocarbon surfaces
- Apply to a clean, dry surface
- Surface temperature limits:  $5^{\circ}\text{C} < T < 45^{\circ}\text{C}$
- Maximum humidity: 80%

CONSUMPTION*	Non-reflective	Reflective		
		Single beading	Double beading	Wet night visibility
Product rate	$\geq 340\text{g}/\text{m}^2$	$225\text{g}/\text{m}^2$	$\geq 420\text{g}/\text{m}^2$	$790\text{g}/\text{m}^2$
Powdering rate	$\geq 65\text{g}/\text{m}^2$	$400\text{g}/\text{m}^2$	$\geq 785\text{g}/\text{m}^2$	$1,440\text{g}/\text{m}^2$
Drying time	$\geq 5\text{min}$	5min	$\geq 6\text{min}$	13min

\* According to certification conditions



## SAFETY - STORAGE

- Product for professional use, non-harmful, non-irritant, non-flammable
- Storage: in a dry, ventilated place, away from frost, sunlight and any source of heat
- Shelf life: 12 months from date of manufacture, in unopened original packaging
- Soiled packaging and cleaning and rinsing products are waste to be treated in accordance with current regulations
- See the Safety Data Sheet at [www.quickfds.fr](http://www.quickfds.fr)

